

GLORY ASFT12-90D (12V90Ah)

Deep Cycle

Specification


Cells Per Unit	6
Voltage Per Unit	12
Capacity	90Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 26.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 5.8 mΩ
Terminal	F6(M8)
Max. Discharge Current	900A (5 sec)
Design Life	15 years (floating charge)
Max. Charging Current	27.0 A
Reference Capacity	C3 68.7AH C5 77.5AH C10 85.7AH C20 90.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	TECHNOPOWER Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



FTD (Front Terminal Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharge. By using strong grids, thick plate and special active material are designed for repeated deep-discharge applications. The FTD series battery offers 30% more cyclic life than the standby series. And the dimensions are designed for 19" and 23" cabinet installation. It is suitable for telecom, solar and wind renewable energy storage, mobility and medical equipment, RV, telecom, broadband and cable TV, UPS systems etc.



Dimensions

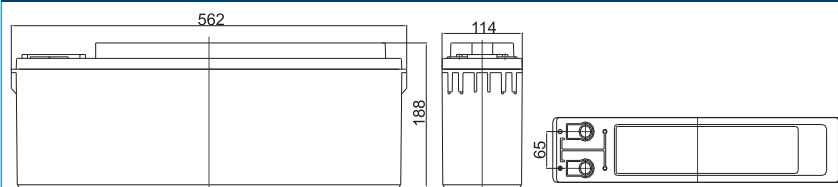

Length	562±2mm (22.1 inches)
Width	114±2mm (4.49 inches)
Height	188±2mm (7.40 inches)
Total Height	188±2mm (7.40 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F6 Terminal
Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	212.0	162.8	97.0	54.7	32.6	25.4	19.9	16.9	10.9	9.00	4.66
1.65V	195.3	152.2	91.9	52.8	31.5	24.6	19.3	16.4	10.8	8.91	4.64
1.70V	181.0	143.2	87.2	51.1	30.6	23.5	18.7	15.9	10.6	8.74	4.58
1.75V	166.0	134.1	83.7	49.5	29.4	22.9	18.2	15.5	10.4	8.66	4.50
1.80V	151.1	122.8	80.6	47.3	28.4	22.5	17.8	15.3	10.3	8.57	4.46
1.85V	118.2	101.6	68.4	42.2	26.0	20.9	16.7	14.1	9.66	8.06	4.41

Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	361.0	284.0	176.3	102.6	61.5	48.1	38.3	32.0	21.1	17.7	9.31
1.65V	347.6	276.1	172.2	100.9	59.9	46.9	37.4	31.2	21.0	17.5	9.23
1.70V	324.4	261.3	163.9	97.9	58.4	45.1	36.2	30.4	20.7	17.1	9.15
1.75V	301.9	246.7	158.2	95.2	56.3	44.0	35.4	29.7	20.4	17.0	8.98
1.80V	278.1	228.0	153.0	91.3	55.0	43.8	34.7	29.3	20.0	16.8	8.90
1.85V	220.6	191.6	131.3	82.0	50.7	40.8	32.6	27.1	18.9	15.9	8.81


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.


GLORY ASFT12-90D (12V90Ah)

Deep Cycle


Discharge Characteristics Curve

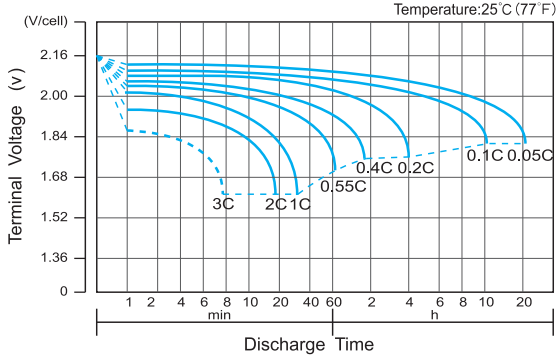


Charge Characteristic Curve for Cycle Use (IU)

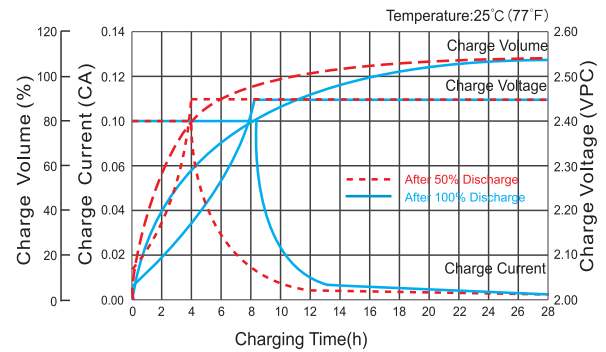


Cycle Life in Relation to Depth of Discharge

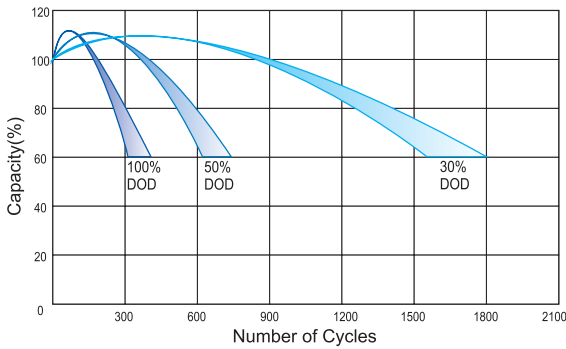


Relationship Between Charging Voltage and Temperature

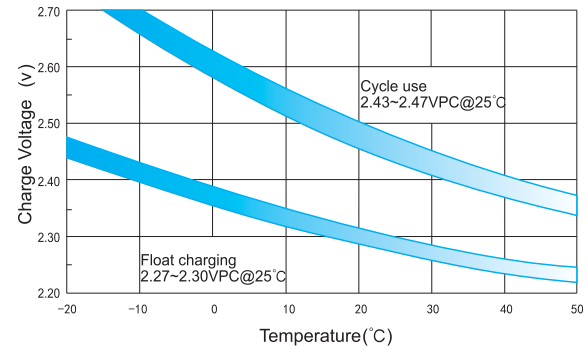


Temperature Effects on Capacity

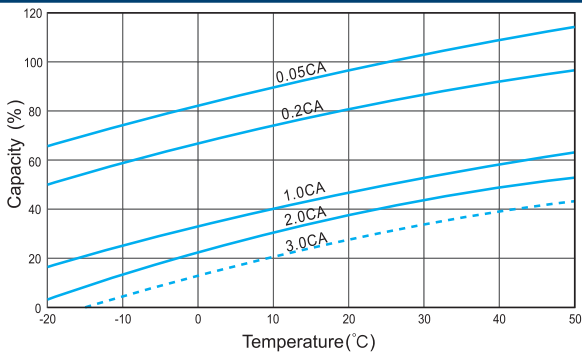


Storage Characteristics

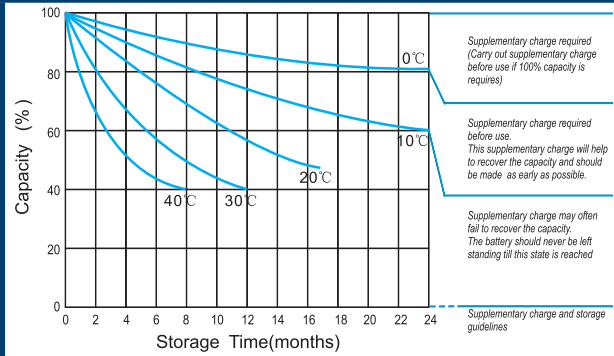

Effect of Temperature on Long Term Life

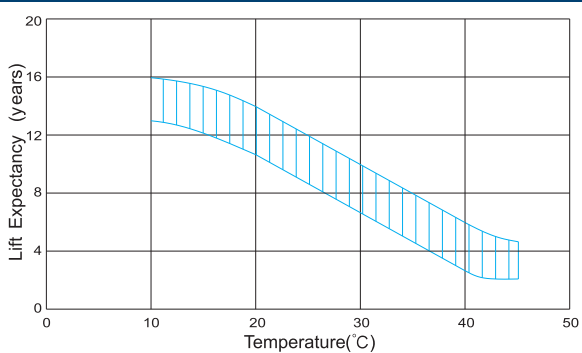

Relationship of OCV And State of Charge (20°C)

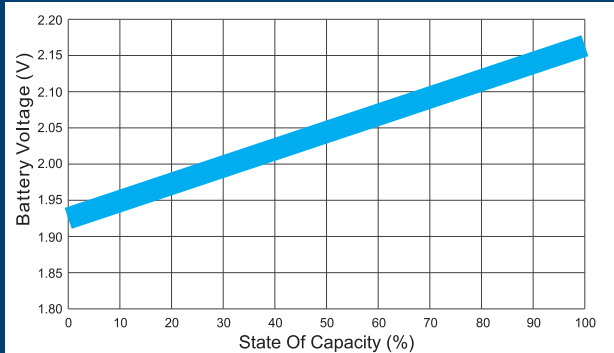

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.