

# GLORY ASDC12-40 (12V40Ah)

## Specification

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	40Ah@20hr-rate to 1.75V per cell @25°C
<b>Weight</b>	Approx. 12.4 Kg (Tolerance ±3.0%)
<b>Internal Resistance</b>	Approx. 11.0 mΩ
<b>Terminal</b>	F4(M5)/F11 (M6)
<b>Max. Discharge Current</b>	400A (5 sec)
<b>Design Life</b>	12 years (floating charge)
<b>Max. Charging Current</b>	12.0 A
<b>Reference Capacity</b>	C3 30.6AH C5 34.4AH C10 38.1AH C20 40.0AH
<b>Float Charging Voltage</b>	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
<b>Cycle Use Voltage</b>	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
<b>Operating Temperature Range</b>	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
<b>Normal Operating Temperature Range</b>	25°C ±5°C
<b>Self Discharge</b>	TECHNOPOWER Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C, and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
<b>Container Material</b>	A.B.S. UL94-HB, UL94-V0 Optional.



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharging. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment and cable TV etc.




ISO 9001 ISO 14001 OHSAS 18001



MH 28539

## Dimensions

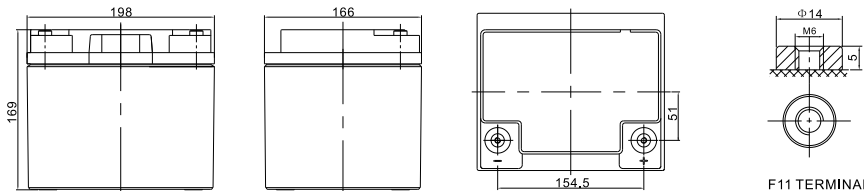

Length	198±2mm (7.80 inches)
Width	166±2mm (6.54 inches)
Height	169±2mm (6.65 inches)
Total Height	169±2mm (6.65 inches)
Terminal	Value
M5	6-7 N*m
M6	8-10 N*m
M8	10-12 N*m

Unit: mm

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	97.13	73.83	43.56	24.29	14.47	11.27	8.840	7.519	4.823	4.000	2.073
1.65V	89.47	69.04	41.26	23.47	13.98	10.92	8.576	7.283	4.785	3.962	2.062
1.70V	82.92	64.93	39.12	22.71	13.61	10.46	8.311	7.086	4.709	3.886	2.036
1.75V	76.07	60.81	37.58	22.00	13.09	10.19	8.084	6.889	4.633	3.848	2.000
1.80V	69.23	55.69	36.19	21.02	12.64	10.00	7.896	6.800	4.557	3.810	1.981
1.85V	54.17	46.08	30.69	18.77	11.56	9.308	7.404	6.260	4.291	3.581	1.962









### Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	165.4	128.8	79.15	45.61	27.35	21.40	17.04	14.23	9.399	7.845	4.139
1.65V	159.2	125.2	77.30	44.83	26.62	20.87	16.62	13.85	9.324	7.769	4.102
1.70V	148.6	118.5	73.58	43.51	25.95	20.07	16.09	13.50	9.211	7.618	4.065
1.75V	138.3	111.9	71.00	42.31	25.03	19.57	15.72	13.19	9.061	7.543	3.991
1.80V	127.4	103.4	68.71	40.58	24.46	19.46	15.41	13.02	8.910	7.467	3.954
1.85V	101.1	86.88	58.92	36.44	22.52	18.15	14.51	12.04	8.422	7.053	3.917

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C<sub>20</sub> should reach 95% after the first cycle and 100% after the third cycle.

# GLORY ASDC12-40 (12V40Ah)

Deep Cycle

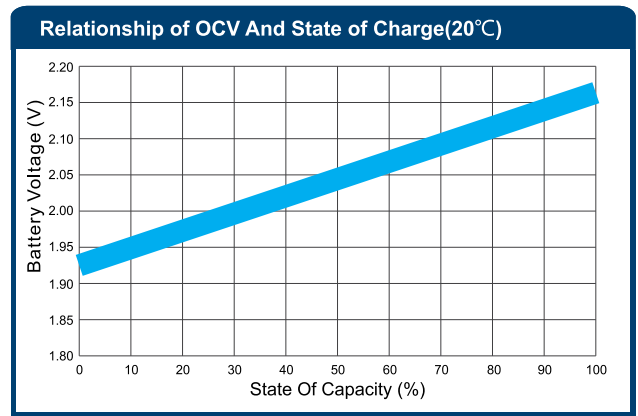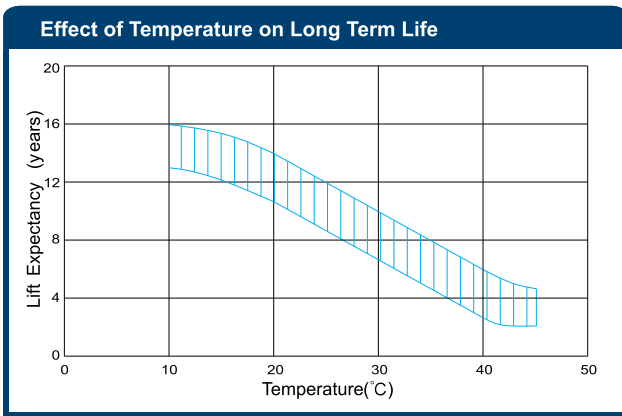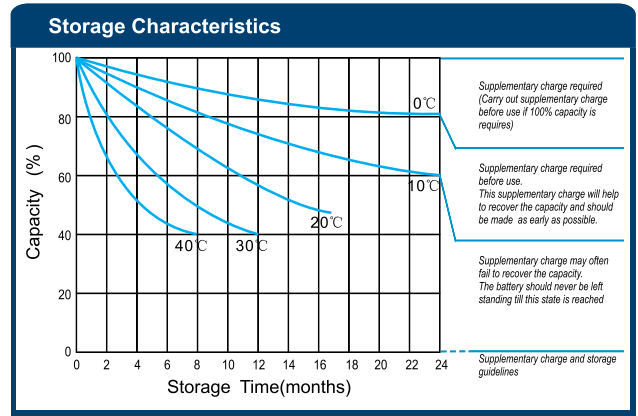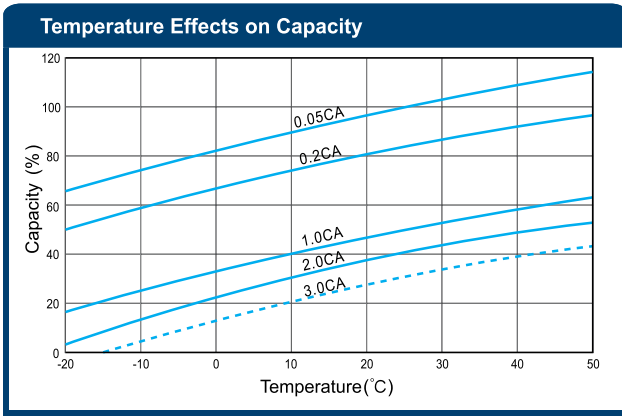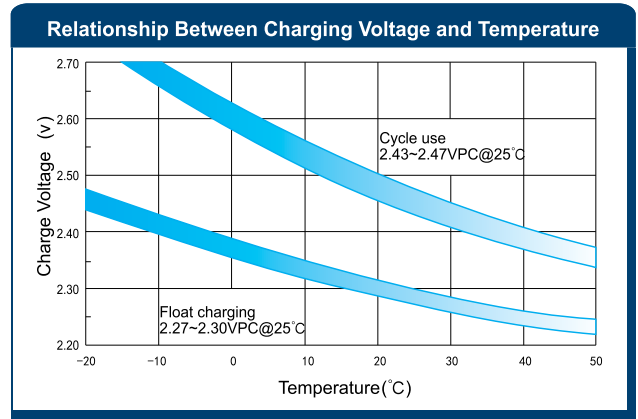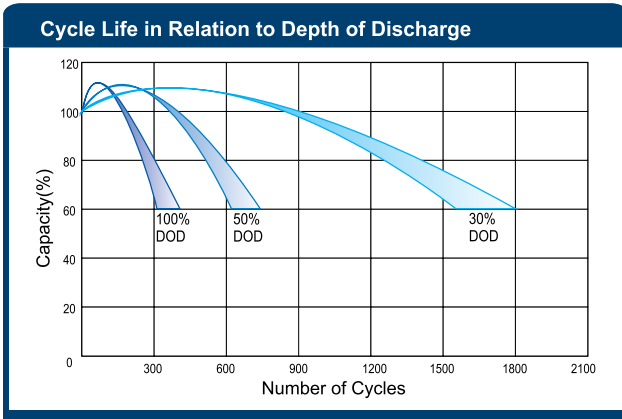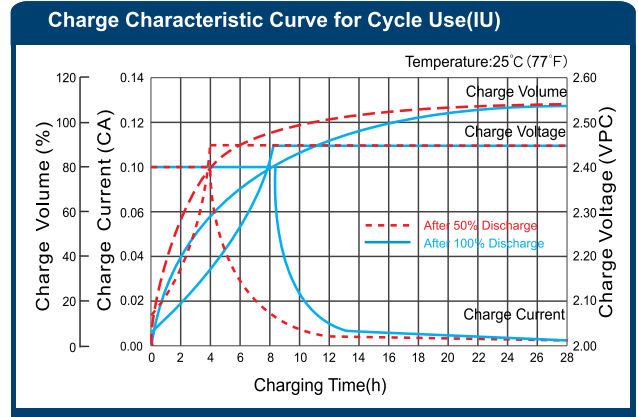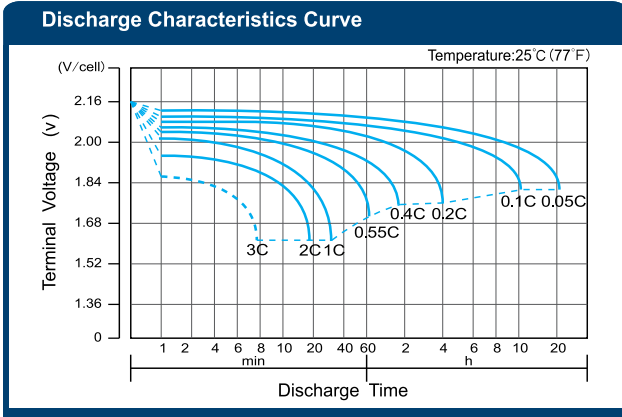

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.