


TECHNOPOWER

TECHNOPOWER SYSTEMS LIMITED

GLORY ASVM II

3-5.5KVA



► Product Snapshot

Model: 3KW/3.5KW/5.5KW

Nominal Voltage: 230VAC

Frequency Range: 50Hz/60Hz





Key Features:


- Pure sine wave solar inverter
- Output power factor 1
- Parallel operation up to 9 units
- High PV input voltage range
- Battery independent design
- Built-in 100A MPPT solar charger
- Battery equalization function to optimize battery performance and extend lifecycle


Hybrid Operation

With battery connected

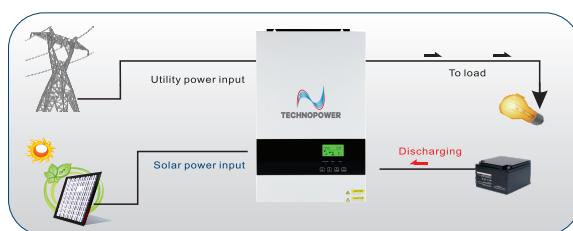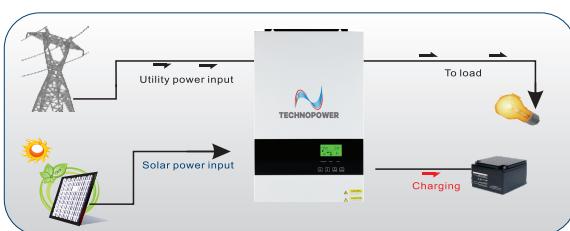

Without battery connected

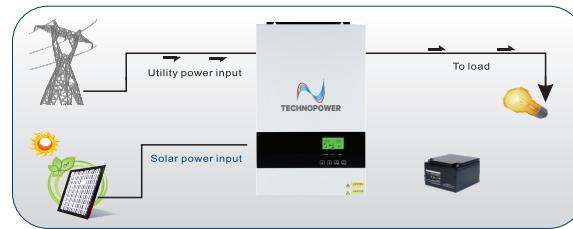





TECHNOPOWER

TECHNOPOWER SYSTEMS LIMITED

- Single phase output up to 49.5KW using 9 units

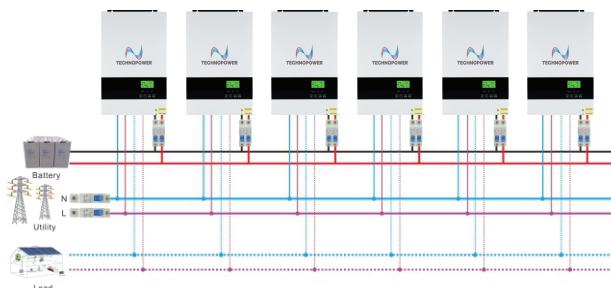

- Three phase output using either 3 units(16.5KW) or max 9 units(49.5KW)

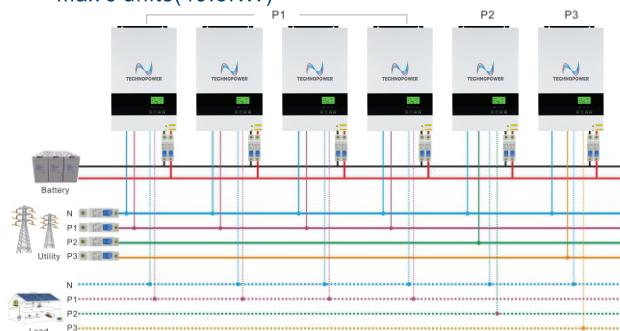

GLORY ASVM II

**Wall Mounted Integrated Solar Inverter Technical Specification
Built-in MPPT Solar Controller**

MODEL	GLORY ASVM II 3000-24	GLORY ASVM II 3500-24	GLORY ASVM II 5500-48
Rated Power	3000VA / 3000W	3500VA / 3500W	5500VA / 5500W
INPUT			
Voltage	230 VAC		
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)		
Frequency Range	50 Hz/60 Hz (Auto sensing)		
OUTPUT			
AC Voltage Regulation(Batt. Mode)	230VAC ± 5%		
Surge Power	6000VA	7000VA	11000VA
Efficiency (Peak)	up to 93.5%		
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)		
Waveform	Pure sine wave		
BATTERY			
Battery Voltage	24 VDC		
Floating Charge Voltage	27 VDC		
Overcharge Protection	33 VDC		
SOLAR CHARGER & AC CHARGER			
Maximum PV Array Open Circuit Voltage	500 VDC		
Maximum PV Array Power	5500 W		
MPPT Range @ Operating Voltage	120~450 VDC		
Maximum Solar Charge Current	100 A		
Maximum AC Charge Current	80 A		
Maximum Charge Current	100 A		
PHYSICAL			
Dimension, D x W x H (mm)	550x420x225		
Net Weight (kgs)	11.3	11.5	12.1
Communication Interface	USB/RS232		
ENVIRONMENT			
Humidity	5% to 95% Relative Humidity (Non-condensing)		
Operating Temperature	-10°C to 50°C		
Storage Temperature	-15°C to 60°C		

Note: Product specifications are subject to change without further notice.

SSI20-0000012-04