

GLORY ASFT12-100LD (12V100Ah)

Deep Cycle

Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	100Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 33.0 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 5.5 mΩ
Terminal	F9(M8)
Max. Discharge Current	1000A (5 sec)
Design Life	15 years (floating charge)
Max. Charging Current	30.0 A
Reference Capacity	C3 76.5AH C5 86.0AH C10 95.2AH C20 100.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	TECHNOPOWER Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



FTD (Front Terminal Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharge. By using strong grids, thick plate and special active material are designed for repeated deep-discharge applications. The FTD series battery offers 30% more cyclic life than the standby series. And the dimensions are designed for 19" and 23" cabinet installation. It is suitable for telecom, solar and wind renewable energy storage, mobility and medical equipment, RV, telecom, broadband and cable TV, UPS systems etc.




ISO 9001 ISO 14001 OHSAS 18001



MH 28539

Dimensions

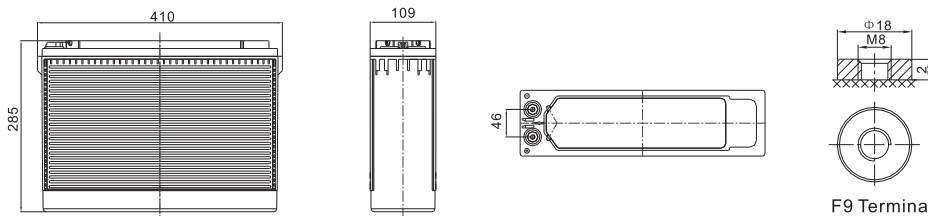

Length	410±2mm (16.1 inches)
Width	109±2mm (4.29 inches)
Height	285±2mm (11.2 inches)
Total Height	293±2mm (11.5 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

F9 Terminal

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	244.9	186.3	110.0	61.3	36.2	28.2	22.1	18.8	12.1	10.0	5.18
1.65V	225.6	174.2	104.2	59.3	35.0	27.3	21.4	18.2	12.0	9.90	5.15
1.70V	209.1	163.8	98.8	57.4	34.0	26.2	20.8	17.7	11.8	9.71	5.09
1.75V	191.9	153.5	94.9	55.6	32.7	25.5	20.2	17.2	11.6	9.62	5.00
1.80V	174.6	140.5	91.4	53.1	31.6	25.0	19.7	17.0	11.4	9.52	4.95
1.85V	136.6	116.3	77.5	47.4	28.9	23.3	18.5	15.6	10.7	8.95	4.91

Constant Power Discharge Characteristics : WPC(25°C)









F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	417.1	325.0	199.8	115.2	68.4	53.5	42.6	35.6	23.5	19.6	10.3
1.65V	401.6	316.0	195.1	113.2	66.5	52.2	41.6	34.6	23.3	19.4	10.3
1.70V	374.8	299.1	185.7	109.9	64.9	50.2	40.2	33.8	23.0	19.0	10.2
1.75V	348.8	282.3	179.2	106.8	62.6	48.9	39.3	33.0	22.7	18.9	10.0
1.80V	321.4	261.0	173.4	102.5	61.2	48.7	38.5	32.5	22.3	18.7	9.88
1.85V	254.9	219.2	148.8	92.0	56.3	45.4	36.3	30.1	21.1	17.6	9.79

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.

GLORY ASFT12-100LD (12V100Ah)

Deep Cycle

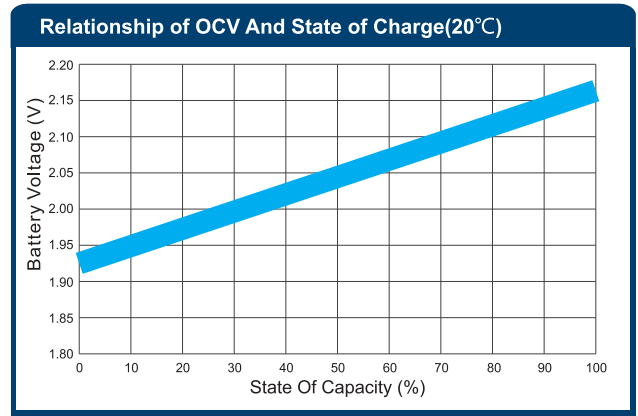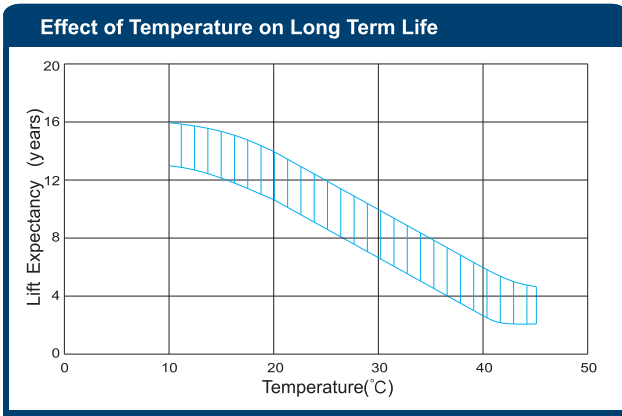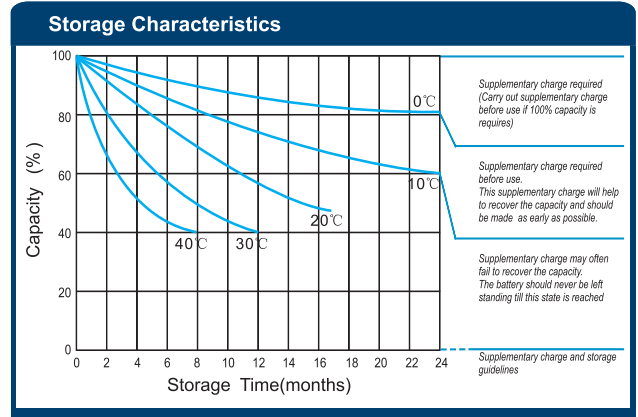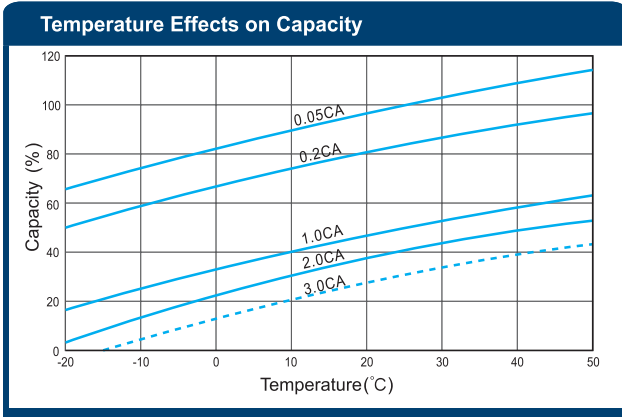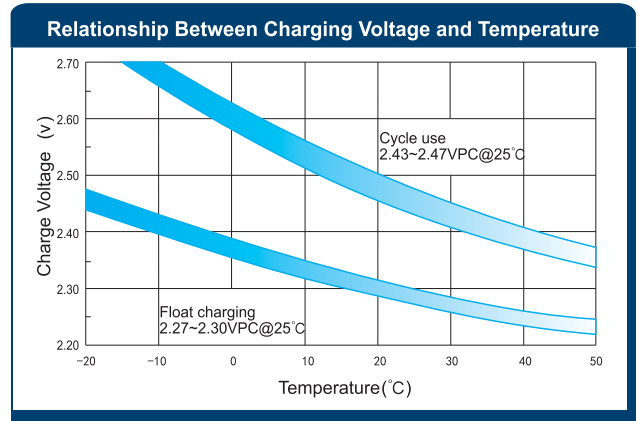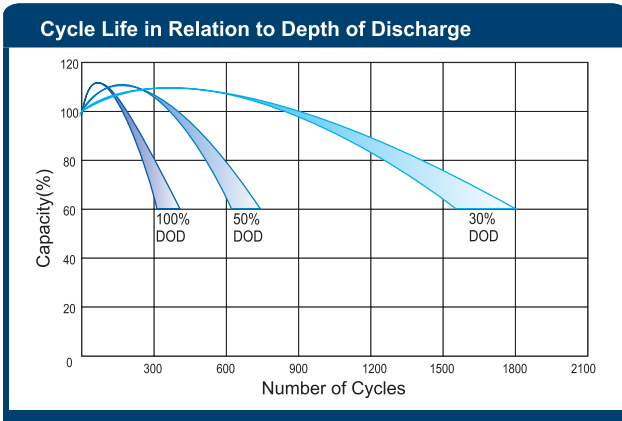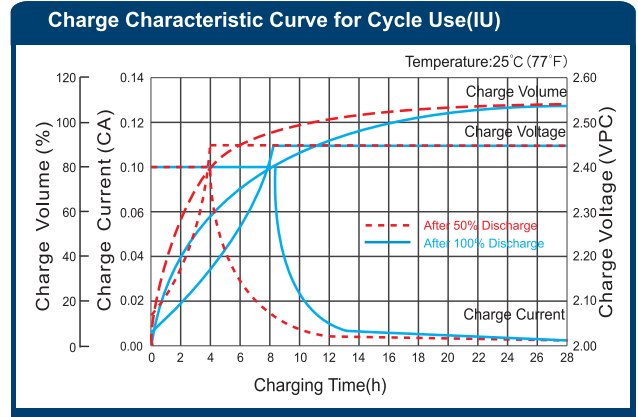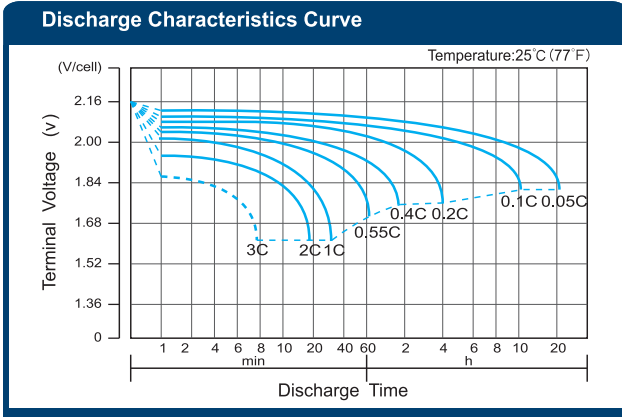

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.