

GLORY ASDC12-260H (12V260Ah)

Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	260Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 77.0 Kg (Tolerance±3.0%)
Internal Resistance	Approx. 2.5 mΩ
Terminal	F14 (M8)
Max. Discharge Current	2600A (5 sec)
Design Life	12 years (floating charge)
Max. Charging Current	78.0 A
Reference Capacity	C3 198.8AH
	C5 223.9AH
	C10 247.6AH
	C20 260.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C
	Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	TECHNOPOWER Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharging. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment and cable TV etc.




ISO 9001 ISO 14001 OHSAS 18001



MH 28539

Dimensions

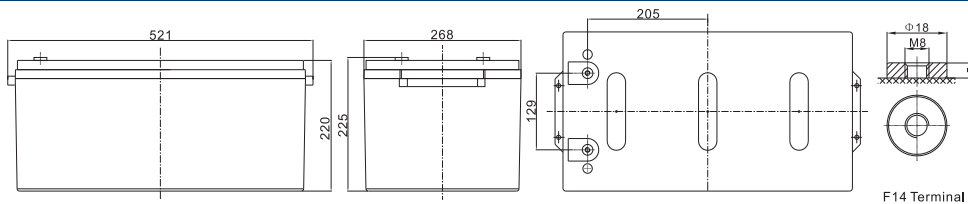

Length	521±2mm (20.5 inches)
Width	268±2mm (10.6 inches)
Height	220±2mm (8.66 inches)
Total Height	225±2mm (8.86 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	465.0	283.1	157.9	94.04	73.25	57.46	48.88	31.35	26.00	13.47
1.65V	434.9	268.2	152.5	90.89	71.00	55.74	47.34	31.10	25.75	13.40
1.70V	408.9	254.3	147.6	88.47	68.00	54.02	46.06	30.61	25.26	13.23
1.75V	383.0	244.2	143.0	85.07	66.25	52.55	44.78	30.12	25.01	13.00
1.80V	350.8	235.2	136.6	82.16	65.00	51.32	44.20	29.62	24.76	12.87
1.85V	290.2	199.5	122.0	75.14	60.50	48.13	40.69	27.89	23.28	12.75

Constant Power Discharge Characteristics : WPC(25°C)









F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	811.1	514.4	296.5	177.8	139.1	110.7	92.52	61.09	50.99	26.90
1.65V	788.7	502.4	291.4	173.0	135.6	108.0	90.02	60.61	50.50	26.66
1.70V	746.5	478.2	282.8	168.7	130.4	104.6	87.77	59.87	49.52	26.42
1.75V	704.6	461.5	275.0	162.7	127.2	102.2	85.77	58.90	49.03	25.94
1.80V	651.3	446.5	263.8	159.0	126.5	100.2	84.61	57.92	48.54	25.70
1.85V	547.2	383.0	236.9	146.4	118.0	94.29	78.26	54.74	45.84	25.46

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.

GLORY ASDC12-260 (12V260Ah)

Deep Cycle

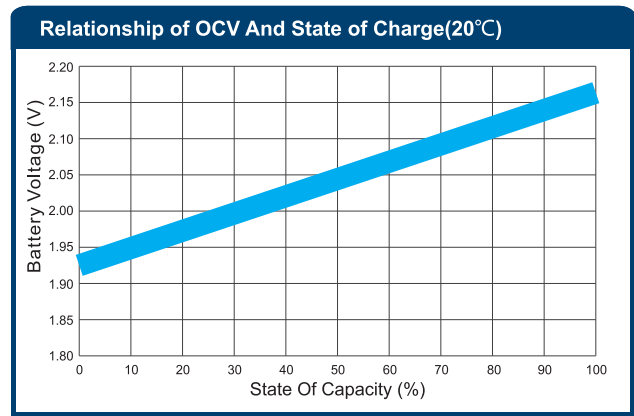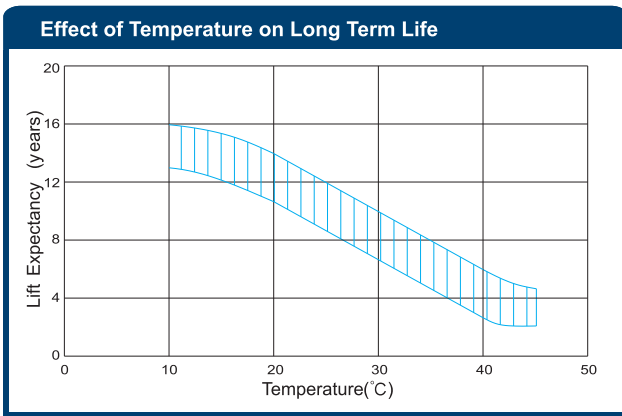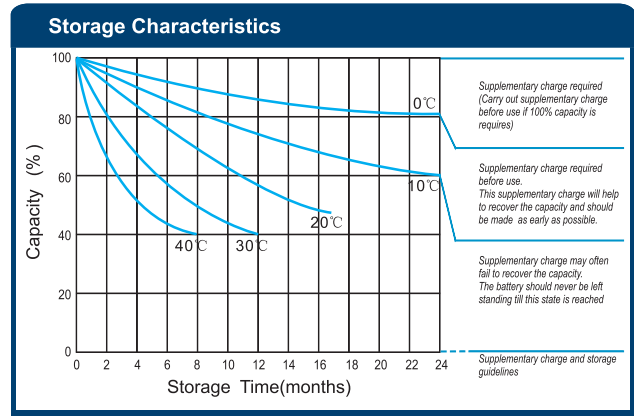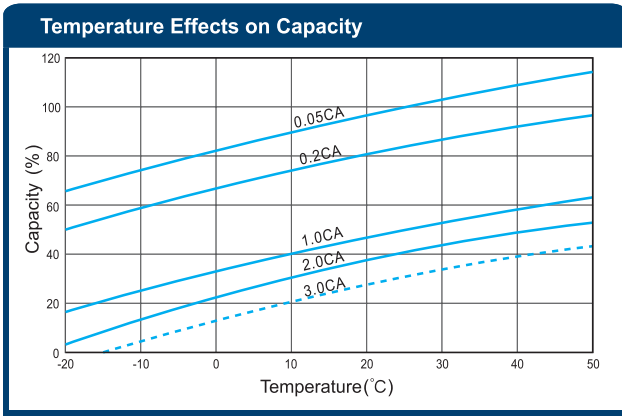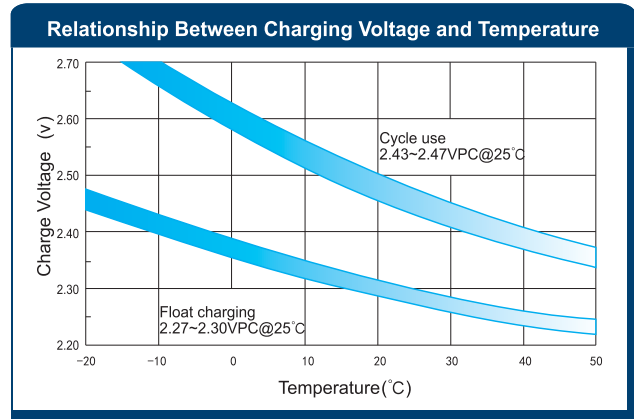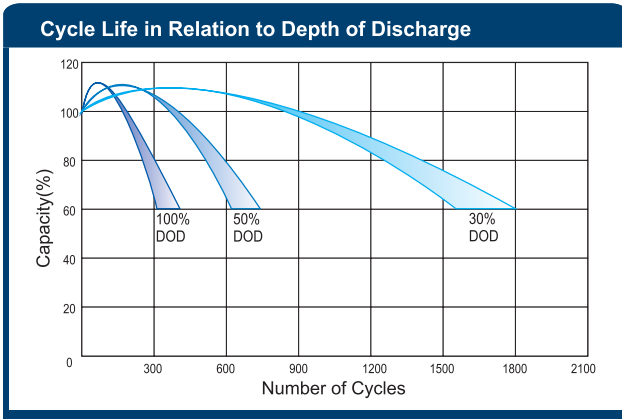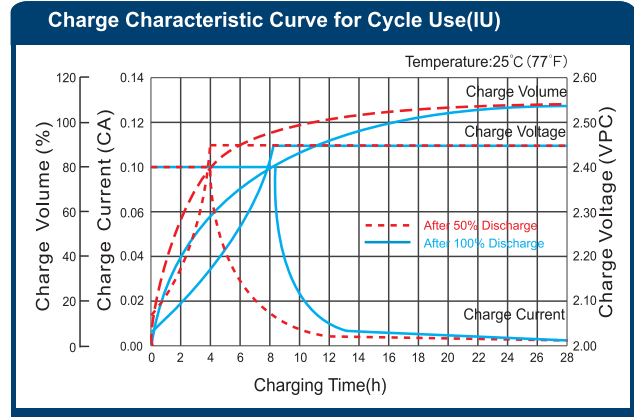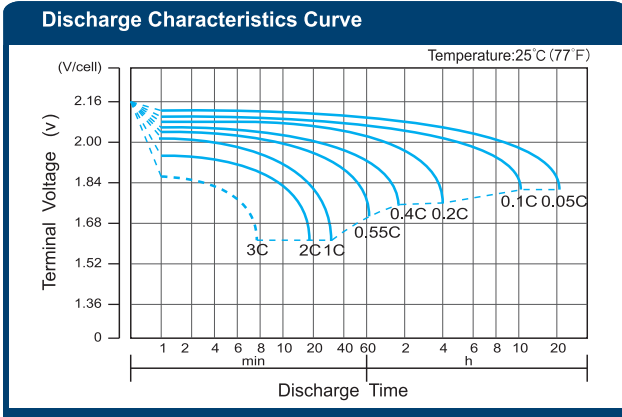

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.