


GLORY ASOFGSI MAX1

Off-Grid Inverter



- Customizable status LED bar with RGB lights
- Built-in wifi for mobile monitoring (Android/iOS Apps are available)
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Replaceable fan design for ease of maintenance
- Battery independent design
- Configurable AC/PV output usage timer and prioritization
- Selectable high power charging current
- Selectable input voltage range for home appliances and personal computers
- Compatible to Utility Mains or generator input
- Built-in anti-dust kit
- Optional DC output for DC fan, LED bulb, router and so on
- Parallel operation up to 6 units only available for 7.2kVA

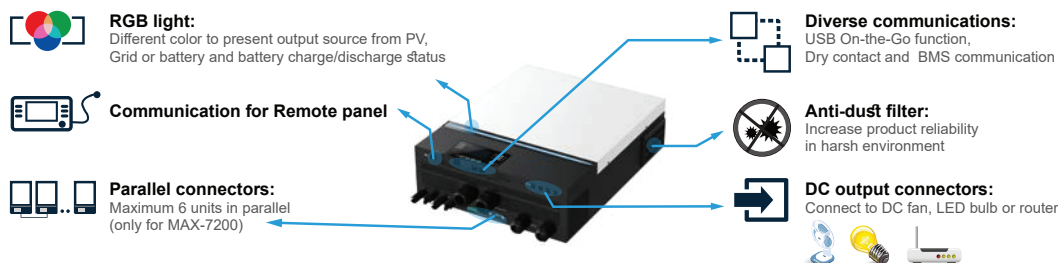

GLORY ASOFGSI MAX1 Off-Grid Solar Inverter Specification

MODEL	GLORY ASOFGSI MAX1 3600	GLORY ASOFGSI MAX1 7200
Rated Power	3600VA / 3600W	7200VA / 7200W
PARALLEL CAPABILITY	NO	Yes, up to 6 units
INPUT		
Voltage	230 VAC	230 VAC
Selectable Voltage Range	170280- VAC (For Personal Computers) 90280- VAC (For Home Appliances)	170280- VAC (For Personal Computers) 90280- VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)	
OUTPUT		
AC Voltage Regulation (Batt. Mode)	230VAC ± 5%	230VAC ± 5%
Surge Power	7500VA	15000VA
Efficiency (Peak)	90% ~ 93%	
Transfer Time	15 ms (For Personal Computers) ; 20 ms (For Home Appliances)	
Waveform	Pure sine wave	
No Load Power Consumption	< 45W	< 70W
Optional DC Voltage	12 VDC ± 5%, 100W	
BATTERY		
Battery Voltage	24 VDC	48 VDC
Floating Charge Voltage	27 VDC	54 VDC
Overcharge Protection	33 VDC	66 VDC
SOLAR CHARGER & AC CHARGER		
Solar Charger Type	MPPT	
Maximum PV Array Power	4000 W	8000W (4000W x 2)
MPPT Range @ Operating Voltage	120 ~ 450 VDC	90 ~ 450 VDC
Maximum PV Array Open Circuit Voltage	500 VDC	500 VDC
Maximum Solar Charge Current	80 A	120 A
Maximum AC Charge Current	80 A	120 A
Maximum Charge Current	80 A	120 A
PHYSICAL		
Dimension, D x W x H (mm)	147.4 x 432.5 x 553.6	
Net Weight (kgs)	14.1	18.4
Communication Interface	USB/RS232/RS485/Wifi/Dry-contact	
OPERATING ENVIRONMENT		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Operating Temperature	-10°C to 50°C	
Storage Temperature	-15°C to 60°C	
STANDARD		
Compliance Safety	CE	CE

Product specifications are subject to change without further notice.